

## CaptureMF6– Estimate stream and evapotranspiration capture with simple MODFLOW6 models

Regulators such as Nevada Division of Water Resources (NDWR) need to estimate capture of streamflow by pumping ([Nevada State Engineer, 2021](#)). Analytical and numerical models have been deemed appropriate tools by NDWR for estimating capture from withdrawals of a groundwater right. Analytical models facilitate rapid analysis because input requirements are minimal. Numerical models can better approximate heterogeneous hydraulic properties and discharges to streams and phreatophytes ([Barlow and Leake, 2012](#)), but analyses generally are not rapid.

The Glover solution ([Jenkins, 1968](#)) likely is the most frequently applied analytical model, because spreadsheet solutions have been readily available ([Hunt, 2005](#); [Environment Canterbury, 2024](#)). The Glover solution, like many other analytical solutions, assumes an infinite, homogenous, and isotropic aquifer that is penetrated fully by a straight-line stream and pumping well. These superficially concerning assumptions are not the primary limitation.

Analytical estimates primarily are limited by not simultaneously simulating potential capture from streams and evapotranspiration. Other analytical solutions more thoroughly characterize connection between aquifer and stream (Hunt, 2003), but do not simulate distributed discharge as evapotranspiration. This is a significant limitation where pumped water comes from storage and capture of discharge to streams and evaporation.

Simultaneous capture from streams and evapotranspiration can be analyzed rapidly with simplified numerical models that are created, executed, and synthesized with the current version of the **CaptureMF6** workbook. Aquifer, evapotranspiration area, and stream are defined with simple geometries and homogeneous properties to limit input requirements. Aquifer and evapotranspiration area extents are defined by lengths and widths. These areas are centered where pumping wells are projected on a straight-line approximation of the stream that bisects the aquifer (Figure 1). Lateral discretization is limited to specifying uniform, square cells in the evapotranspiration area and expanding row heights and column widths by a single multiplier to the aquifer extents (Figure 1). Vertical discretization is fixed at thicknesses of 1 and 99 ft in layers 1 and 2, respectively.

Simple, numerical models created by the **CaptureMF6** workbook simulate change from pumping with the same superposition assumptions in the Glover solution ([Jenkins, 1968](#)). All initial heads are 0 ft and heads are 0 ft in single stream that is simulated with constant-head package ([Langevin, et.al., 2017](#)). The straight-line stream is simulated in layer 1 of a single column that spans all rows. This straight-line approximation is a regressed fit to the user-specified stream segment (Figure 1).

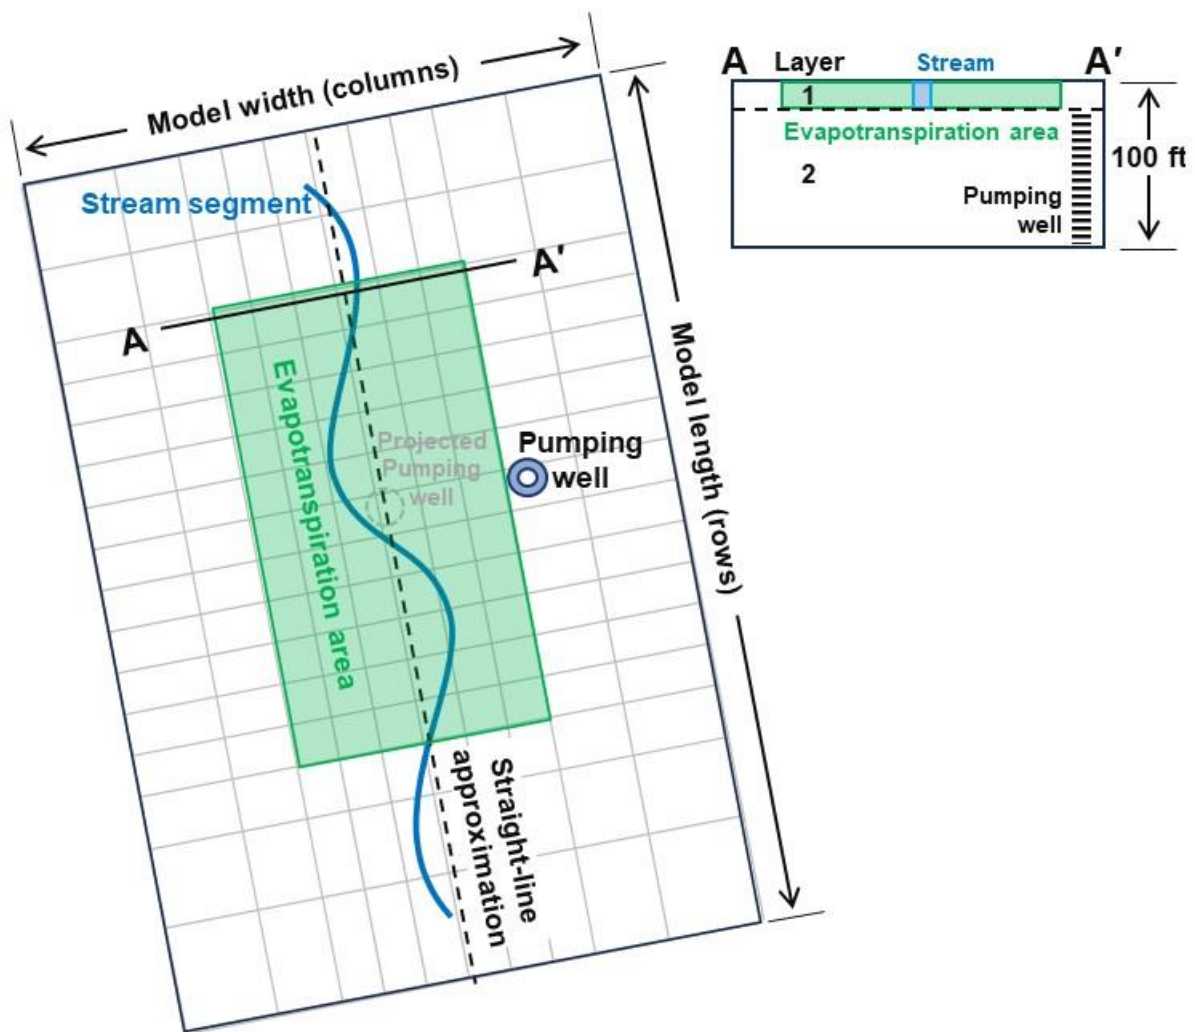


Figure 1.— Simplified MODFLOW6 template for analyzing stream and evapotranspiration capture from proposed pumping.

Capture from the evapotranspiration area is rate limited and is simulated with two MODFLOW packages, evapotranspiration (EVT) and well (WEL) ([Langevin, et.al., 2017](#)). This capture-limited boundary limits the total capture of discharge to the maximum evapotranspiration rate after simulated drawdown exceeds the extinction depth of evapotranspiration ([Halford and Plume, 2011](#); p. 35). The WEL package simulates injection of water into a model cell, while EVT package simulates removal of water from the same model cell. Injection from the WEL package equals cell area times maximum evapotranspiration rate to balance discharge from the EVT package in the same cell. No capture occurs initially when simulated head is 0 and equals the elevation of the ET surface. As simulated water levels decline, injected volumes do not change, while EVT discharge decreases. Capture from the evapotranspiration area is the sum of volumes injected with the WEL package and discharged with the EVT package. Cells in WEL and EVT packages are assigned to layer 1 (Figure 1).

Significant hydraulic properties and evapotranspiration parameters are defined with ranges so potential capture can be estimated with multiple models. These parameters are transmissivity (T), specific yield (Sy), maximum evapotranspiration rate (ETr), and extinction depth of evapotranspiration (ETd). Synthesizing multiple MODFLOW6 model results in a new workbook facilitates rapidly viewing effects of tested parameters on stream and evapotranspiration capture. Ratio of horizontal to vertical hydraulic conductivity and specific storage were specified because these parameters are less significant than T, Sy, ETr, and ETd.


Pumping wells are simulated with constant or time-varying rates in a second WEL package. Pumpage is assigned to the nearest cell that contains mapped coordinates and is assigned vertically to layer 2 (Figure 1). Pumping from wells can be specified as a constant rate or vary with time. Time-varying, pumping rates are specified at user-specified times and distributed to annual stress periods. Pumping rates can be specified in acre-feet per year (acre-ft/yr), cubic feet per second (ft<sup>3</sup>/s), gallons per minute (gpm), cubic feet per day (ft<sup>3</sup>/d), cubic meters per day (m<sup>3</sup>/d), or cubic meters per second (m<sup>3</sup>/s).

Simulation period is user defined and automatically divided into annual stress periods. Analyzing 50 or 100 years of pumping would be simulated with 50 or 100 stress periods, respectively. Annual periods can be defined as 365 or 365.25 days to conform with regulatory specifications.

### ***Verification with Analytical Solution***

Simulated capture with **CaptureMF6** was verified by comparison with an analytical solution that simulates a partially penetrating stream ([Hunt, 1999](#)). The Hunt ([1999](#)) solution is similar to the Glover solution ([Jenkins, 1968](#)) except that the infinite, straight-line stream is partially penetrating instead of bisecting the aquifer. Vertical resistance between stream and aquifer is approximated with streambed conductance in an otherwise isotropic aquifer. The Hunt ([1999](#)) solution was solved with the program STRMDEPL08 ([Reeves, 2008](#)).


Simulated stream captures were similar with both Hunt ([1999](#)) solution and **CaptureMF6** (Figure 2). Typical transmissivities of 100, 500, and 2,000 ft<sup>2</sup>/d were tested. Pumping well being 1,000 ft from the stream and specific yield being 0.15 were specified explicitly in both analytical and numerical models. Streambed conductance (ft/d) only exists in Hunt ([1999](#)) and was defined as 0.02 times specified transmissivity (ft<sup>2</sup>/d). Evapotranspiration was not simulated and vertical anisotropy of hydraulic conductivity was specified as 1 in **CaptureMF6** to match assumptions in Hunt ([1999](#)).

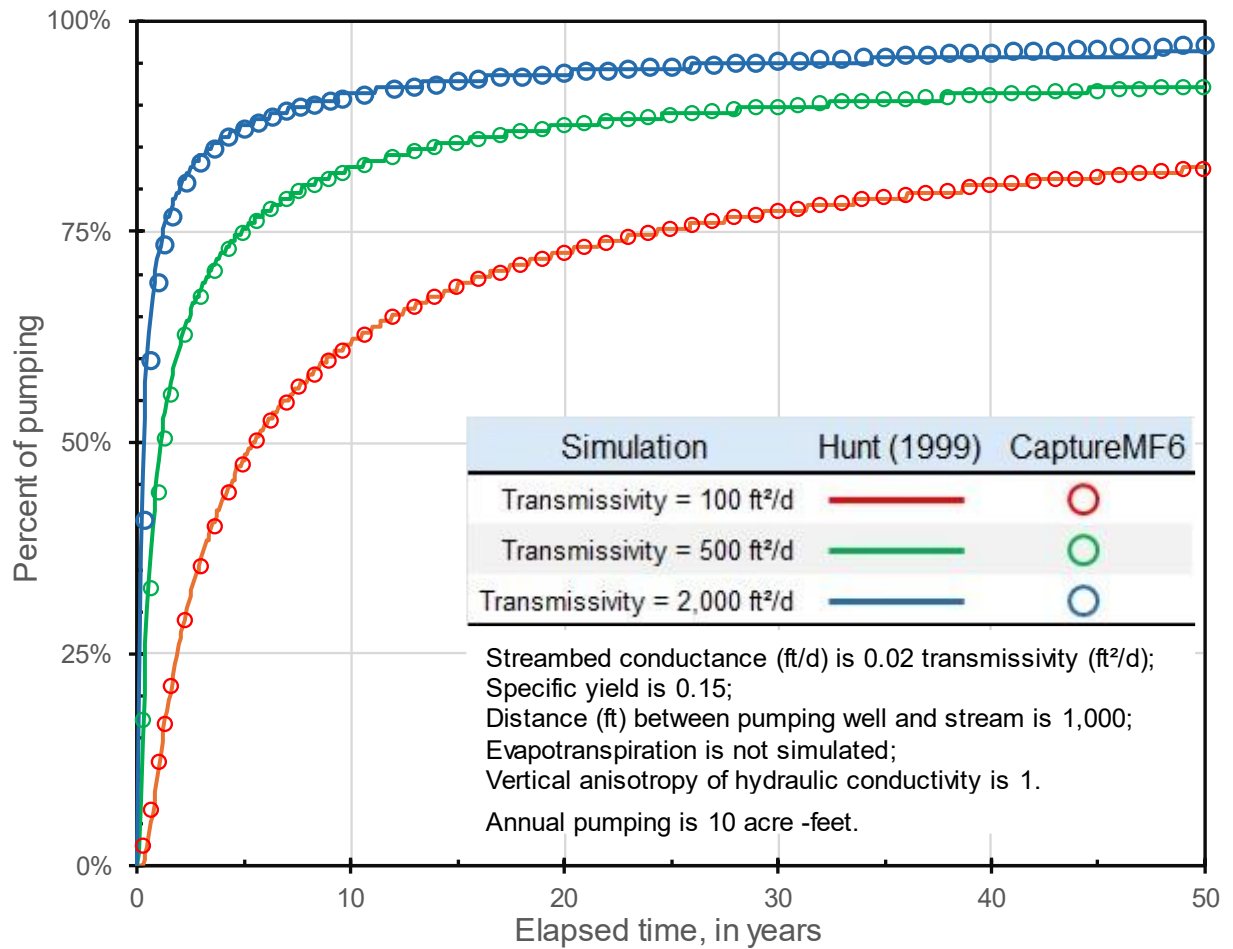

**Figure 2.— Comparison of stream captures with no evapotranspiration from an aquifer with isotropic hydraulic conductivity that was simulated with Hunt (1999) and MF6capture.**

### ***Pine Creek example***

Estimating capture from a stream and evapotranspiration area will be illustrated with an example from Pine Valley, hydrographic area (HA) 053 (Figure 3). A total of 6.6 acre-ft/yr was proposed to be pumped from four points of diversion that ranged between 2,400 and 3,500 ft from Pine Creek. Maximum stream capture ranged between 5 and 6 acre-ft/yr with a Glover analysis and transmissivity estimates between 900 and 2,300 ft<sup>2</sup>/d (Braumiller, 2023). This exceeded the annual pumping exemption of 5 acre-ft in section 3C of order 1329 ([Nevada State Engineer, 2021](#)), which prompted further analysis.

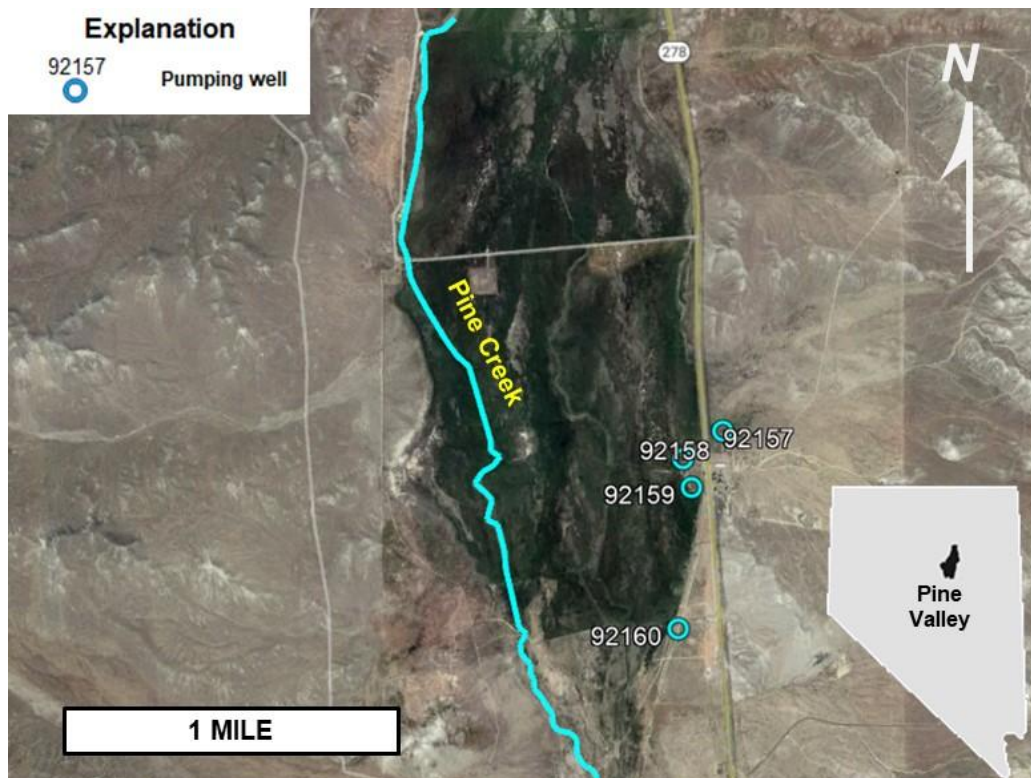


**Figure 3.— Example of estimating capture from Pine Creek and evapotranspiration from four points of diversion in Pine Valley HA053.**

Capture from evapotranspiration at the Pine Creek site is likely with greater than 0.5 mi of evapotranspiration area between Pine Creek and proposed points of diversion (Figure 3). About 4,000 acres of groundwater evapotranspiration (ET<sub>gw</sub>) were mapped between 4 mi upstream and 3 mi downstream of the proposed points of diversion ([Huntington, et.al., 2022](#)).


Probability of ET<sub>gw</sub> rate from the evapotranspiration area was defined with greater than 17,000 estimates (Figure 4). Each estimate was an average rate from a 30-m on a side raster ([Huntington, et.al., 2022](#)). Annual estimated ET<sub>gw</sub> rates ranged between <0.1 and 2.8 ft and averaged 0.6 ft. More probable rates for half the ET<sub>gw</sub> discharge ranged between 0.5 and 0.9 feet per year (ft/yr). Reduction of raster-based estimates of ET<sub>gw</sub> is demonstrated in the companion workbook *fig04\_Example-of-GWET-PDF.xlsx*.



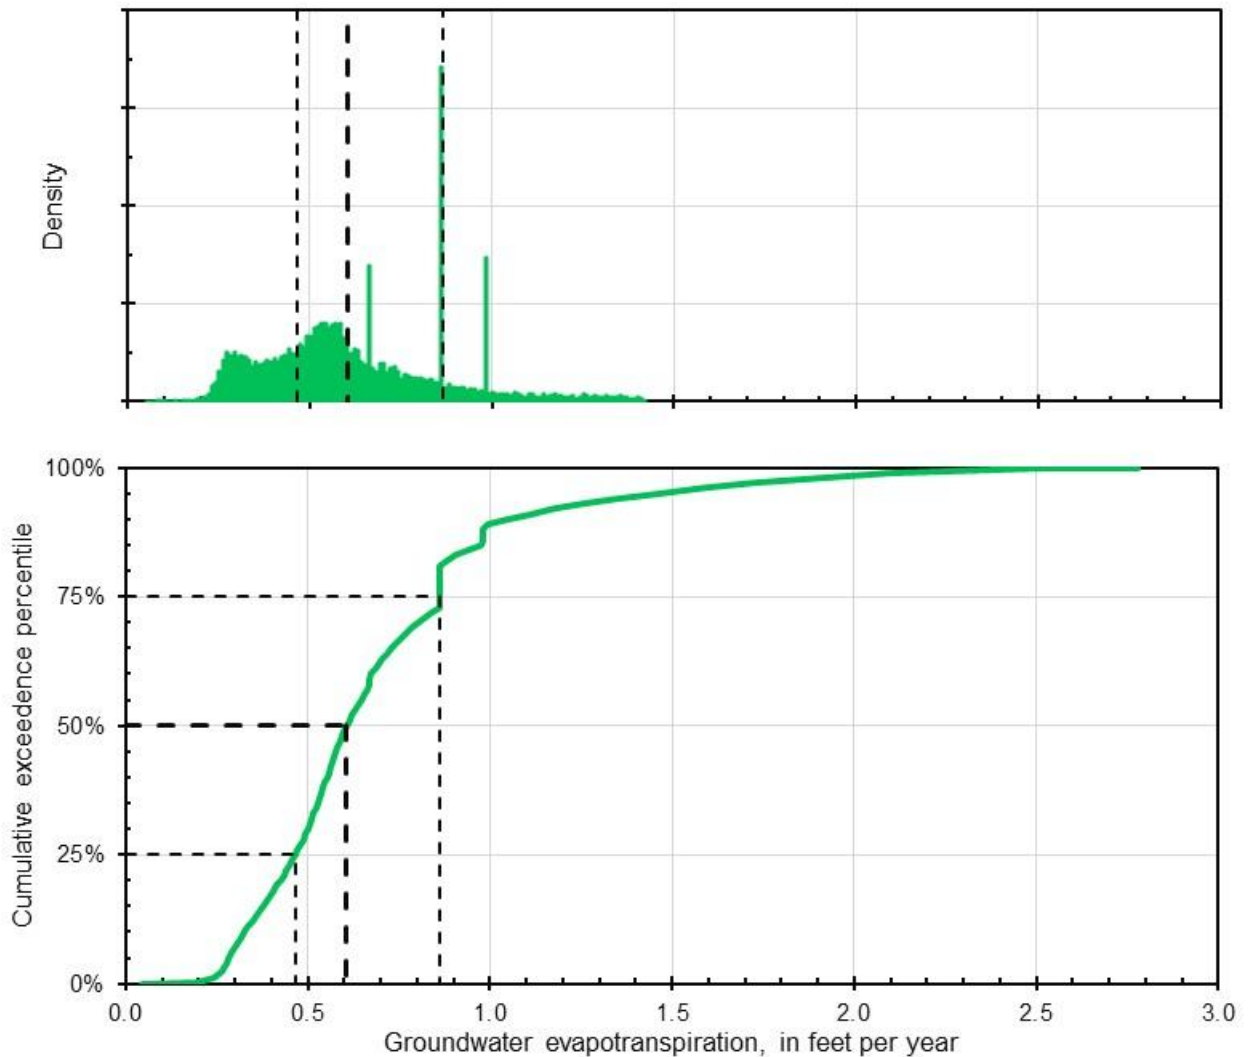


**Figure 4.— Probability distribution and cumulative groundwater evapotranspiration rates from 4,000 acres upstream and downstream of the Pine Creek site.**

Pine Creek site was reanalyzed using the **CaptureMF6** workbook so that capture from evapotranspiration could be estimated in addition to stream capture from Pine Creek (Figure 5). Transmissivity ranged between 900 and 2,300 ft<sup>2</sup>/d as in the previous Glover analysis (Braumiller, 2023). Specific yield ranged between 0.1 and 0.2. Maximum evapotranspiration rate ranged between 0.5 and 0.9 ft/yr. Extinction depth of evapotranspiration ranged between 3 and 9 ft.

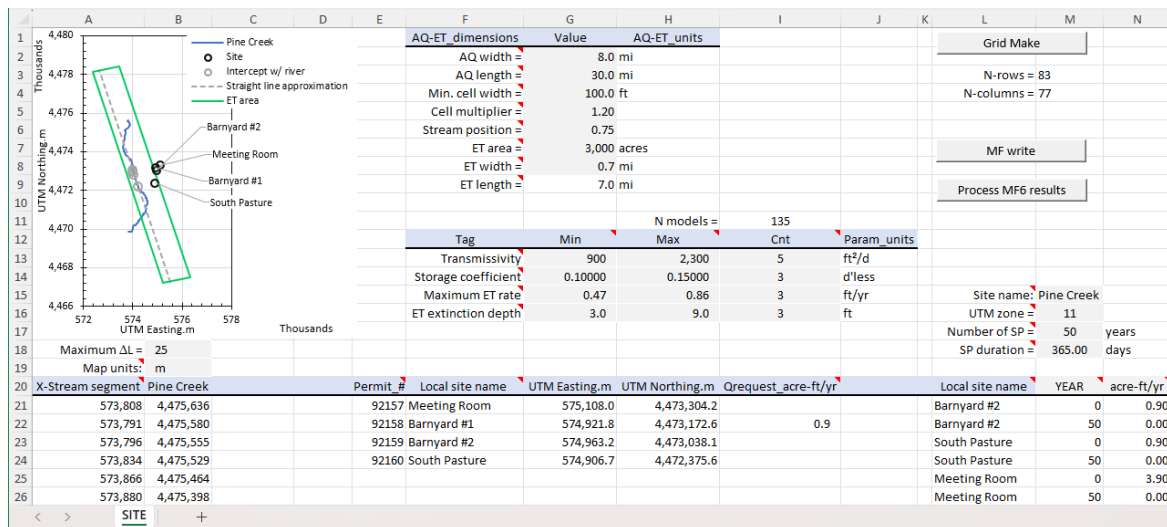

**Figure 5.— SITE page in CaptureMF6 workbook, where stream segment and pumping wells are specified along with aquifer dimensions and hydraulic properties.**

Annual stream and evapotranspiration capture averaged 3.4 and 2.5 acre-ft, respectively, in the **CaptureMF6** analysis (Figure 6). Total annual capture of 5.9 acre-ft from the **CaptureMF6** analysis was similar to capture estimates from the previous Glover analysis (Braumiller, 2023). Results primarily differed because the **CaptureMF6** analysis more realistically simulated evapotranspiration capture.

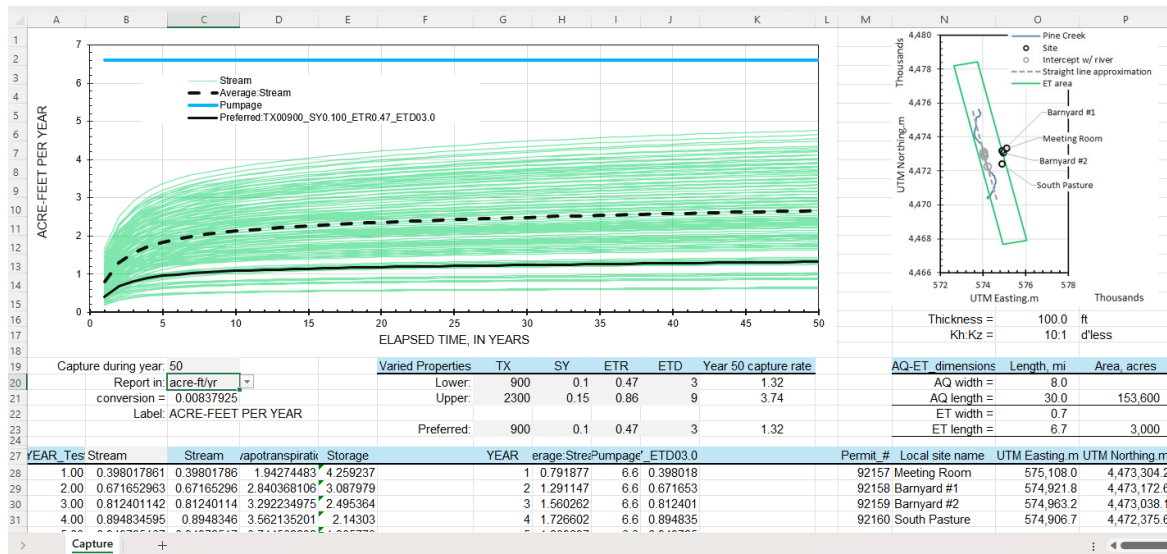

**Figure 6.— New workbook that summarizes simulated capture from stream and evapotranspiration.**

The file CaptureMF6.v6.zip contains,

- **.\\CaptureMF6\\CaptureMF6.v6.xlsm** – Workbook with macros for,
  - 1.) Defining stream, ET area, and wells in user-defined MF6 grid;
  - 2.) Writing family of alternative MF6 models in individual folders and batch files to execute all MF6 models; and
  - 3.) Reading all MF6 model results, reducing output frequency, and synthesizing results in a new workbook.
- **fig04\_Example-of-GWET-PDF.xlsx** – Auxiliary workbook for estimating range of groundwater evapotranspiration (ET<sub>gw</sub>) rates from raster rates in OpenET ([Huntington, et.al., 2022](#)).
- **.bin\\MF6.exe** – MF6 version 6.0.4 executable.
- **CaptureMF6-EXPLAIN.v6.pdf** – Explanatory document

Zip file can be downloaded with the following link

<https://halfordhydrology.com/capturemf6/>.

**UNZIP FIRST!!!** Workbook and MF6.exe will not work in a zip file.

## ***Revisions***

February 9, 2024 —Revisions through version 1 are initial release.

April 14, 2024 —Revisions in version 2 include. River can be positioned between the left and right edges of the ET area. Added a “Local conditions” series to results workbook that depicts representative local conditions with a singular realization.

September 28, 2024 —Revisions in version 3 include. Simulation duration can be changed. Number of stress periods are user defined, where each stress period simulates a year. Pumping from wells can be specified as a constant rate or vary with time.

October 11, 2024 —Revisions in version 4 include. Corrected mistake in depicting ET area relative to stream position, which was reversed in map plot on SITE page.

February 24, 2025 —Revisions in version 5 include. Revised terminology and reporting frequency for greater consistency with Nevada Department of Water Resources (NDWR). Revised so that capture could be reported as percentage of pumping in addition to user-specified flow units. Reporting tabulates capture at user-specified time, which usually is 50 years for NDWR. Workbook revised so that UTM map units can be specified in feet (ft) or meters (m). Added macro to write KML with PODs, digitized stream, straight-line approximation, ET area, and model extent. Revised code to register working directory with workbook location and check for destabilizing elements. Verified MF6 results by comparison to an analytical solution ([Hunt, 1999](#)) in revised documentation.



March 4, 2025 —Revisions in version 6 include. Shifted local X-grid by half of minimum grid width to correct error in stream (CHD) creation. Error occurred where number of columns was even. Added filter to reduce points in discretized stream and introduce gaps if stream represented by multiple, discontinuous polylines. Added option to center straight-line stream approximation on sub-reach of discretized stream reach, where pumping wells are projected on a straight-line approximation of the stream.

### ***Suggested Citation***

Halford, Keith, 2025, CaptureMF6—Estimate stream and evapotranspiration capture with simple MODFLOW6 models, version 6, Halford Hydrology LLC web page, accessed March 2025, at <https://halfordhydrology.com/capturemf6/>


### ***References***

- Barlow, P.M., and Leake, S.A., 2012, Streamflow depletion by wells—Understanding and managing the effects of groundwater pumping on streamflow: U.S. Geological Survey Circular 1376, 84 p. <http://pubs.usgs.gov/circ/1376/>
- Braumiller, S., 2023, Capture analysis for applications 92157-92160 by Nevada Gold Mines, LLC in Pine Valley Hydrographic Basin (HA 053), memorandum from Nevada Department of Water Resources, October 25, 2023, 12 p.
- Environment Canterbury, 2024, Groundwater tools and resources, Environment Canterbury Regional Council web page, accessed February 2024, <https://www.ecan.govt.nz/your-region/your-environment/water/tools-and-resources/>
- Glover, R.E., and Balmer, C.G., 1954, River depletion resulting from pumping a well near a river: American Geophysical Union Trans., v. 35, pt. 3, p. 468-470. <https://doi.org/10.1029/TR035i003p00468>
- Halford, K.J., and Plume, R.W., 2011, Potential effects of groundwater pumping on water levels, phreatophytes, and spring discharges in Spring and Snake Valleys, White Pine County, Nevada, and adjacent areas in Nevada and Utah: U.S. Geological Survey Scientific Investigations Report 2011-5032, 52 p. <https://doi.org/10.3133/sir20115032>
- Hunt, B., 1999, Unsteady Stream Depletion from Ground Water Pumping. Groundwater, 37: 98-102. <https://doi.org/10.1111/j.1745-6584.1999.tb00962.x>
- Hunt, B., 2003, Unsteady stream depletion when pumping from semi-confined aquifer. Journal of Hydrologic Engineering 8, no. 1: 12-19.
- Hunt, B., 2005, Visual Basic Programs for Spreadsheet Analysis. Groundwater, 43: 138-141. <https://doi.org/10.1111/j.1745-6584.2005.tb02293.x>
- Huntington, J. L., Bromley, M., Minor, B., Morton, C. G., and Smith, G., 2022, Groundwater Discharge from Phreatophyte Vegetation, Humboldt River Basin, Nevada, Desert Research Institute Publication No. 41288, prepared for Nevada Department of Conservation and Natural Resources, Division of Water Resource, 46 p. <https://www.dri.edu/project/humboldt-etg/>
- Jenkins, C.T., 1968, Computation of rate and volume of stream depletion by wells: U.S. Geological Survey Techniques and Methods, book 4, chap. D1, 17 p., <https://pubs.usgs.gov/twri/twri4d1>
- Langevin, C.D., Hughes, J.D., Banta, E.R., Niswonger, R.G., Panday, Sorab, and Provost, A.M., 2017, Documentation for the MODFLOW 6 Groundwater Flow Model: U.S. Geological Survey Techniques and Methods, book 6, chap. A55, 197 p., <https://doi.org/10.3133/tm6A55>.

- Nevada State Engineer, 2021, State Engineer's Order No. 1329— Establishing Interim Procedures for Managing Groundwater Appropriations to Prevent the Increase of Capture and Conflict with Rights Decreed Pursuant to the Humboldt River Adjudication, Carson City, Office of the State Engineer of the State of Nevada, 13 p.,  
<http://images.water.nv.gov/images/Orders/1329o.pdf>
- Reeves, H.W., 2008, STRMDEPL08—An extended version of STRMDEPL with additional analytical solutions to calculate streamflow depletion by nearby pumping wells: U.S. Geological Survey Open-File Report 2008–1166, 22 p. <https://doi.org/10.3133/ofr20081166>
- Theis, C.V., 1940, The source of water derived from wells—Essential factors controlling the response of an aquifer to development: Civil Engineering, v. 10, no. 5, p. 277–280.  
<https://water.usgs.gov/ogw/pubs/Theis-1940.pdf>

## CaptureMF6 Workbook

Capture from proposed pumping is analyzed on the SITE page in the CaptureMF6 workbook (Figure 7). Discretized stream segment and pumping wells are specified in columns **A:B** and **E:I**, respectively. Aquifer extent, evaporation area, and model grid guidelines are defined in a table (**F1:H9**). Ranges of hydraulic properties and evapotranspiration parameters and sampling frequency are defined in another table (**F12:J16**). Controls for creating model grid, writing MODFLOW6 models, executing models, and synthesizing model results are in columns **L:N**. Two additional supporting pages, CONTROL and Capture, exist. These pages normally are hidden and do not need to be modified.

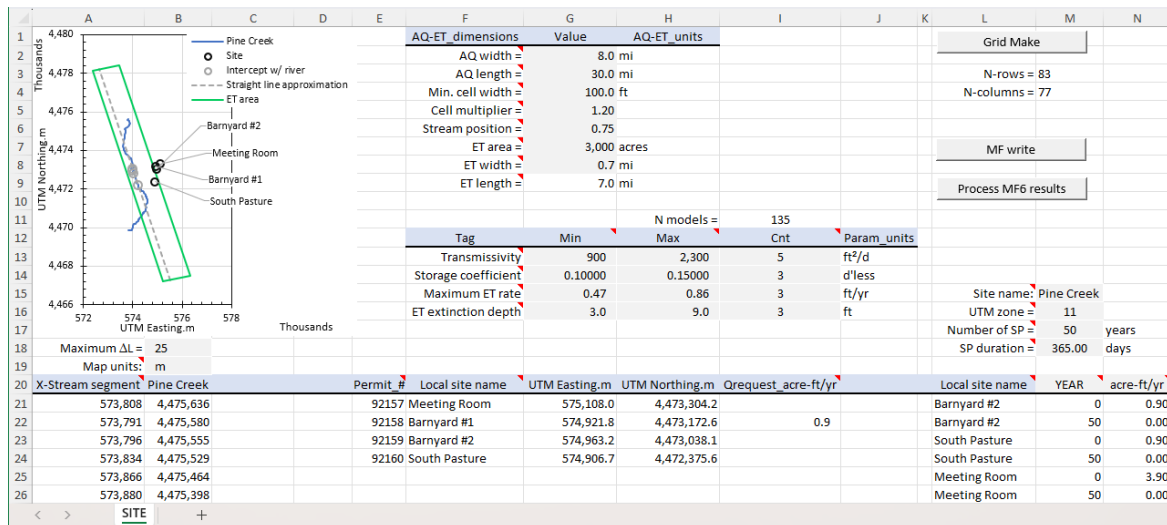

**Figure 7.— SITE page in CaptureMF6 workbook, where stream segment and pumping wells are specified along with aquifer dimensions and hydraulic properties.**


Step-by-step use of the CaptureMF6 workbook is illustrated with the Pine Creek example in the following four sections, *Specify Site*, *Grid Make*, *MF write*, and *Process MF6 results*.

## Specify Site

Map is blank without stream segment (**A20:B999**) or wells (**E21:I100**) specified.

Both stream segment and wells are specified in UTM, which is in zone 11 for Pine Creek example.


A consistent length unit of feet (ft) or meters (m) must be used and defined (**B19**),

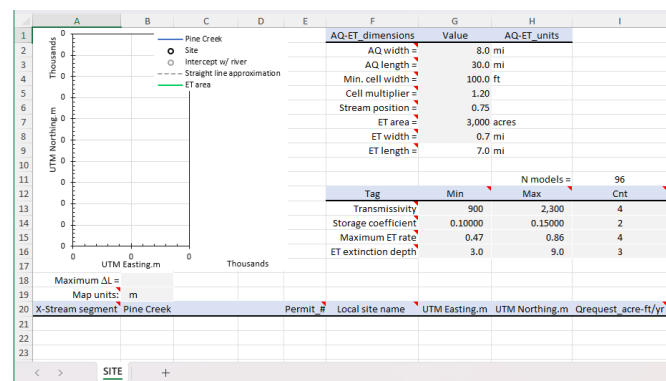

Paste stream segment as values to **A20**.

Stream segment appears on map along with straight-line approximation of stream and edges of ET area.

Minimum and maximum extents of X and Y axes likely will need to be revised for another site.

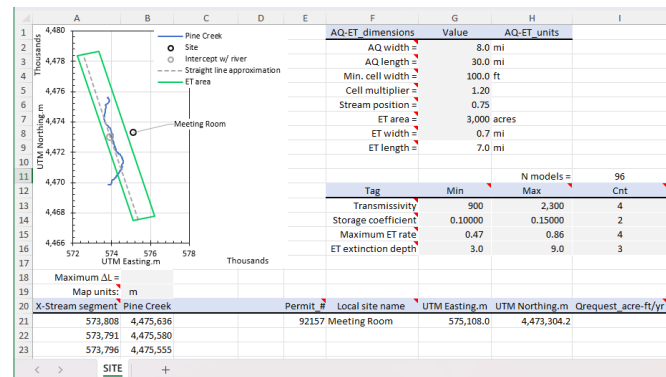


Paste table of wells as values to **E21**.

Columns **E:I** should be Permit number, Local site name, and UTM easting and northing in same feet or meters as specified for stream segment.

Proposed pumping can be specified in column **I** as constant annual pumping or time-varying if fields in column **I** left blank.


Wells will appear on map chart with local site name.

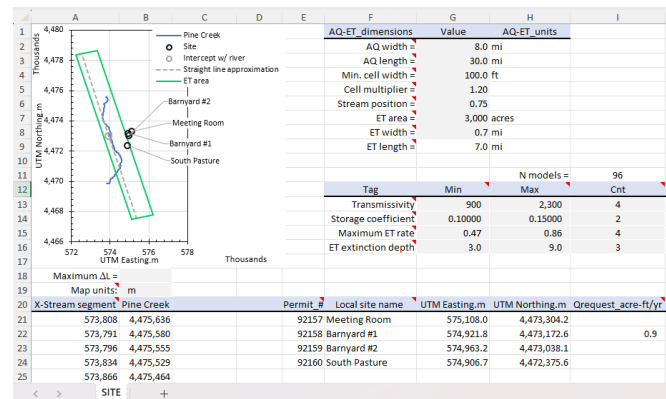

Stream segment can be a single continuous polyline or comprised of multiple discontinuous polylines.


The number of vertices also can be greater than needed.

Maximum  $\Delta L$  in **B18** defines discontinuities in polyline of stream and minimum spacing between vertices.

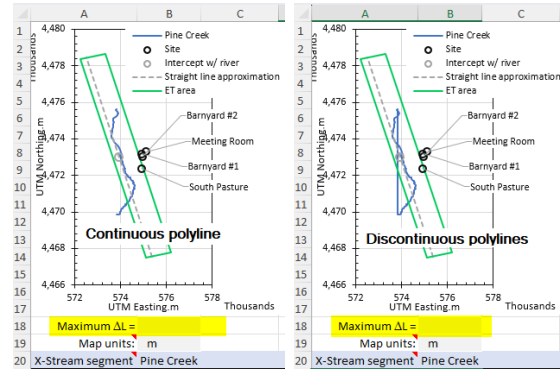

If maximum  $\Delta L$  is blank, **B18** Polyline of stream will not be filtered and straight-line approximation centered on entire polyline.

If maximum  $\Delta L$  has value, **B18** Polyline of stream will be filtered and straight-line approximation centered on sub-reach of polyline where pumping wells are projected.

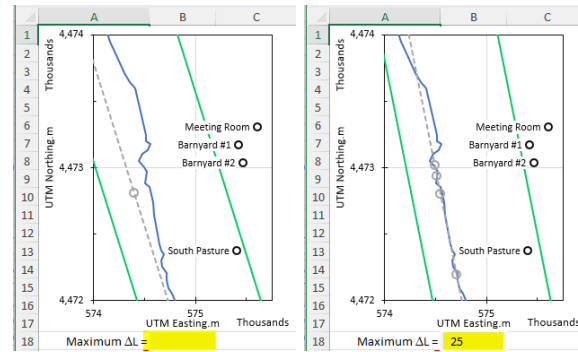

Aquifer dimensions are specified in **G2:G3** in miles.

ET area, in acres, is specified in **G7**. Width of ET area is specified in **G8** in miles. Length of ET area is computed.


ET area will be divided into square model cells that are the minimum cell width (**G4**) on each side.

	F	G	H
1	AQ-ET_dimensions	Value	AQ-ET_units
2	AQ width =	8.0	mi
3	AQ length =	30.0	mi
4	Min. cell width =	100.0	ft
5	Cell multiplier =	1.20	
6	Stream position =	0.75	
7	ET area =	3,000	acres
8	ET width =	0.7	mi
9	ET length =	6.7	mi

Stream position (**G6**) defines ET area relative to stream.

Right edge of ET area approaches stream with stream position of 0.1.

Left edge of ET area approaches stream with stream position of 0.9.

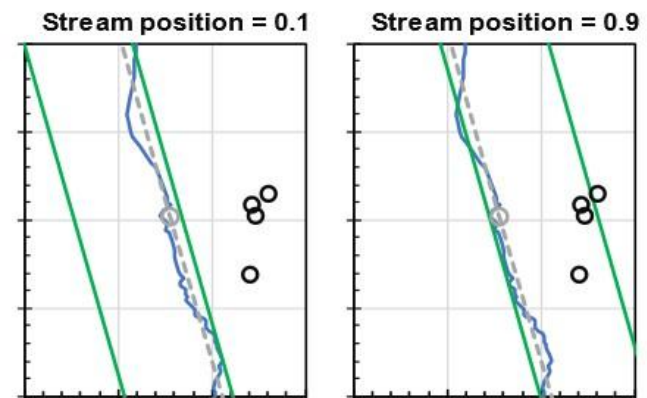



Hydraulic property and evapotranspiration parameter ranges are defined in **G12:H16**.

Minimums in column **G** and Maximums in column **H**.

Sampling frequency is specified in column **I** with total number of MODFLOW6 models reported in **I11**.

	F	G	H	I	J
11			N models =	16	
12	Tag	Min	Max	Cnt	Param_units
13	Transmissivity	900	2,300	2	ft <sup>2</sup> /d
14	Storage coefficient	0.10000	0.15000	2	d'less
15	Maximum ET rate	0.47	0.86	2	ft/yr
16	ET extinction depth	3.0	9.0	2	ft

Total number of MODFLOW6 models increases quickly with increased sampling frequency.

Writing, executing and synthesizing about 100 models of 100 rows of 100 columns takes about 5 minutes.

	F	G	H	I	J
11			N models =	96	
12	Tag	Min	Max	Cnt	Param_units
13	Transmissivity	900	2,300	4	ft <sup>2</sup> /d
14	Storage coefficient	0.10000	0.15000	2	d'less
15	Maximum ET rate	0.47	0.86	4	ft/yr
16	ET extinction depth	3.0	9.0	3	ft

Sampling frequency of 1 can be specified.

The parameter value will equal the average of minimum and maximum values in columns **G & H**.

	F	G	H	I	J
11			N models =	5	
12	Tag	Min	Max	Cnt	Param_units
13	Transmissivity	900	2,300	5	ft <sup>2</sup> /d
14	Storage coefficient	0.10000	0.15000	1	d'less
15	Maximum ET rate	0.47	0.86	1	ft/yr
16	ET extinction depth	3.0	9.0	1	ft

Pumping wells are defined in **E21:I99** and tracked with the "Local site name", column **F**.

Pumping rates are specified in column **I**. Entering a value in column **I** defines a constant pumping rate.

If blank, time-varying flow rate will be specified from site-time-Q table in **L21:N9999**.





	E	F	G	H	I
20	Permit_#	Local site name	UTM Easting, m	UTM Northing, m	Qrequest_acre-ft/yr
21	92157	Meeting Room	575,108.0	4,473,304.2	
22	92158	Barnyard #1	574,921.8	4,473,172.6	0.9
23	92159	Barnyard #2	574,963.2	4,473,038.1	
24	92160	South Pasture	574,906.7	4,472,375.6	

Time-varying flow rate are specified in site-time-Q table, **L21:N9999**.

Well and pumping are paired with "Local site name" in columns **F** and **L**.

Times in pumping schedule do NOT need to coincide with stress periods.

	L	M	N
20	Local site name	YEAR	acre-ft/yr
21	Barnyard #2	0	1
22	Barnyard #2	50	0
23	South Pasture	0	1
24	South Pasture	50	0
25	Meeting Room	0	4
26	Meeting Room	50	0
27			
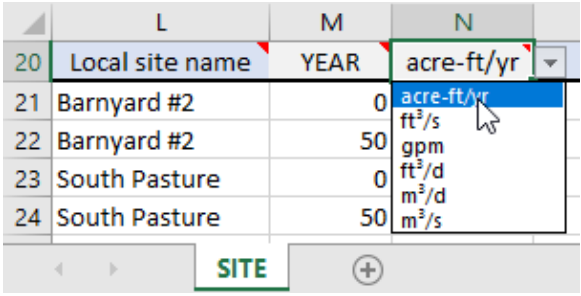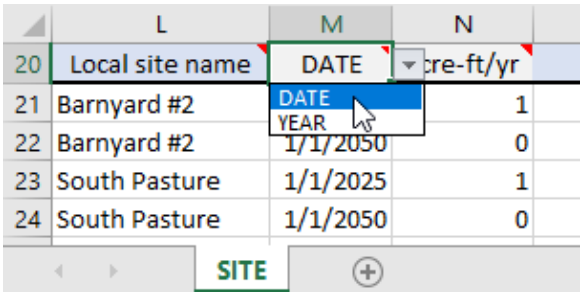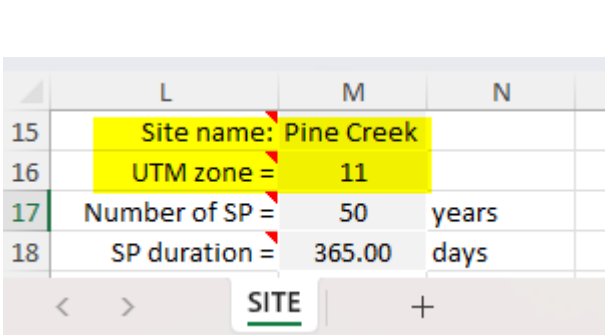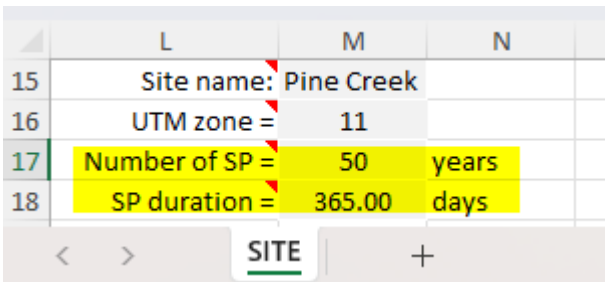
<p>Flow-rate units are defined from pull-down menu in <b>N20</b>.</p>	
<p>Elapsed time can be defined in years or dates with YEAR or DATE options in <b>M20</b>.</p> <p>DATE option uses Excel decimal day definition and first date entry is time 0 in simulation.</p>	
<p>Write KML file with PODs, digitized stream, straight-line approximation, ET area, and model extent.</p> <p>Site name in <b>M16</b> is KML file name. KML not written if <b>M16</b> is blank.</p> <p>UTM zone number is in <b>M17</b>.</p> <p>KML file written after processing MODFLOW6 results with “Process MF6 results”.</p>	
<p>Simulation criteria:</p> <p>Number of annual stress periods and duration of each simulation in years <b>M17</b>.</p> <p>Define days in year as 365 or 365.25 from pull-down in <b>M18</b>.</p>	

### Grid Make

Model discretization primarily is adjusted by changing, Minimum cell width (**G4**) and Cell multiplier (**G5**).

ET area is divided into square model cells that are the minimum cell width (**G4**) on each side.

Cells expand by cell multiplier (**G5**) from outer edges of ET area to edges of model extent.

	F	G	H
1	AQ-ET_dimensions	Value	AQ-ET_units
2	AQ width =	8.0	mi
3	AQ length =	30.0	mi
4	Min. cell width =	100.0	ft
5	Cell multiplier =	1.20	
6	River position =	0.50	
7	ET area =	3,000	acres
8	ET width =	0.7	mi
9	ET length =	6.7	mi

Click “Grid Make” to compute new grid.

Model dimensions are 83 rows of 77 columns with, Minimum cell width (**G4**) = 100 ft and Cell multiplier (**G5**) = 1.20.

	L	M
1	Grid Make	
2		
3	N-rows = 83	
4	N-columns = 77	
5		

Reduce, Minimum cell width (**G4**) to 50 ft and Cell multiplier (**G5**) to 1.10

	F	G	H
1	AQ-ET_dimensions	Value	AQ-ET_units
2	AQ width =	8.0	mi
3	AQ length =	30.0	mi
4	Min. cell width =	50.0	ft
5	Cell multiplier =	1.10	
6	Stream position =	0.50	
7	ET area =	3,000	acres
8	ET width =	0.7	mi
9	ET length =	6.7	mi

Click “Grid Make” to compute new grid.


Model dimensions are 161 rows of 150 columns with, Minimum cell width (**G4**) = 50 ft and Cell multiplier (**G5**) = 1.10.

	L	M
1	Grid Make	
2		
3	N-rows = 161	
4	N-columns = 150	
5		

“Grid Make” also checks that pumping has been specified for all wells.

An error message will appear if non-numeric entry is in column **I** or "Local site name" has not been specified in column **L** of the site-time-Q table, **L21:N9999**.

	F	G	H	I	J	K	L	M
1	AQ-ET dimensions	Value	AQ-ET units				Grid Make	
2	AQ width =	8.0	mi				N-rows = 83	
3	AQ length =	30.0	mi				N-columns = 77	
4	Min. cell width =	100.0	ft					
5	Cell multiplier =	1.20						
6	Stream position =	0.50						
7	ET area =	3,000	acres				MF write	
8	ET width =	0.7	mi					
9	ET length =	6.7	mi				Process MF6 results	
10								
11								
12	Tag					unit_Plus		
13	NPF.dKx-ftPd_KX					ft/d		
14	STO.dStorCoeff_S					d/less		
15	EVT.year_ETR					ft/yr		
16	EVT.dETDepth_ET					ft		
17							Number of SP =	100
18							SP duration =	365.25
19								
20	Local site name	UTM Easting, m	UTM Northing, m	Crequest, acre-ft/yr			Local site name	YEAR
21	Meeting Room	575,108.0	4,473,304.2	No number			Barnyard #2	0
22	Barnyard #1	574,921.8	4,473,172.6				Barnyard #2	50
23	Barnyard #2	574,963.2	4,473,038.1				South Pasture	0
24	South Pasture	574,906.7	4,472,375.6				South Pasture	50



### MF write

Parameter table defines ranges of hydraulic properties and evapotranspiration parameters in **G11:H15** with sampling frequency specified in column **I**.

Parameters in this example are,  
T:900, 1250, 1600, 1950, & 2300 ft<sup>2</sup>/d  
Sy: 0.10, 0.15, & 0.20.

ETr: 0.4, 0.7, & 1.0 ft/yr


ETd: 4, 6, & 8 ft

A total of 135 (**I11**) MODFLOW6 models will be created.


	F	G	H	I	J
11				N models = 135	
12	Tag	Min	Max	Cnt	Param_units
13	Transmissivity	900	2,300	5	ft <sup>2</sup> /d
14	Storage coefficient	0.10000	0.15000	3	d'less
15	Maximum ET rate	0.47	0.86	3	ft/yr
16	ET extinction depth	3.0	9.0	3	ft

Folder with CaptureMF6 workbook contains just the workbook prior to creating MODFLOW6 model folders.

Each model is in a subfolder with parameter values summarized in each subfolder name.

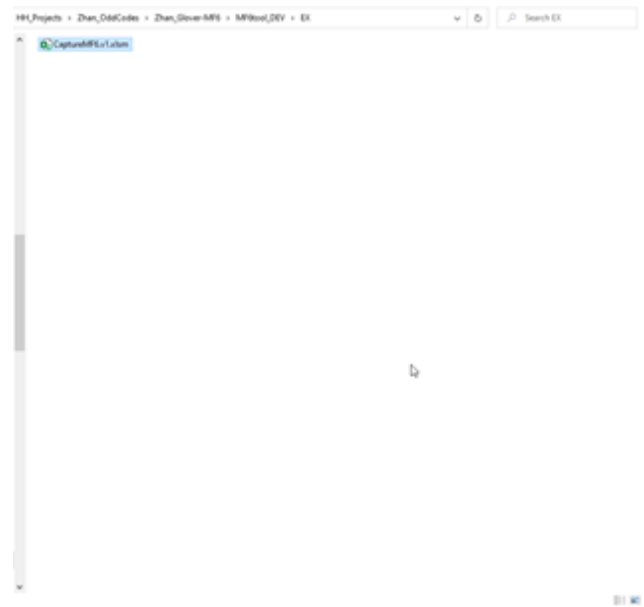


Click “MF write” to generate 135 subfolders with MODFLOW6 model input files and batch files to execute all models.

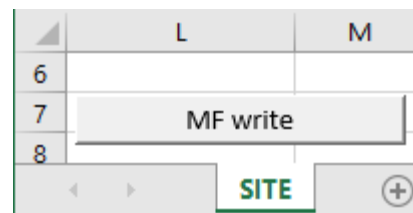



Process will fail if a MF6.exe file is not found in a parallel directory, this directory, or a subdirectory.


Download a copy of [MF6](#) and add to folder if absent.

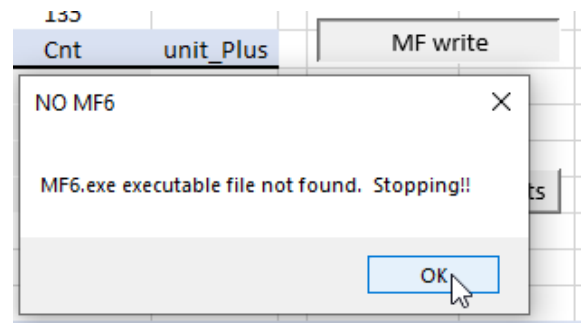

135 subfolders were created with MODFLOW6 model input files.


Multiple batch files also were created to execute all models. The number of batch files varies with the number of processors on a given machine.

Each subfolder contains a MODFLOW6 model with parameter values summarized in each subfolder name.

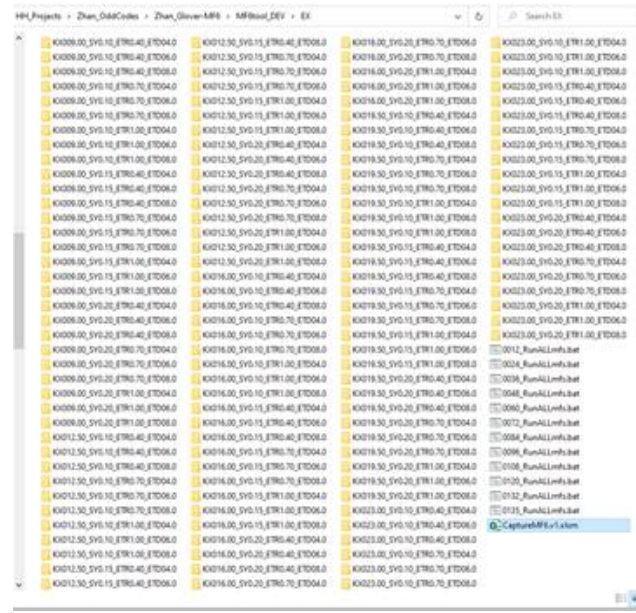

## Process MF6 results

Click “Process MF6 results” to either execute the MODFLOW6 models or synthesize the model results.

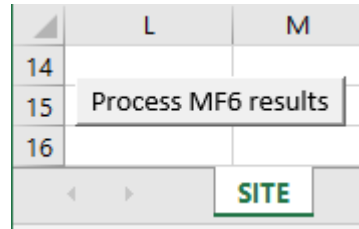


Multiple batch files with names of **????\_RunALLmfs.bat** will exist in the target folder if the MODFLOW6 models have not been executed.

A batch file will exist for each processor if enough models were created,


N-models > 4\*number\_of\_processors

A minimum of 4 model calls per batch file is required.

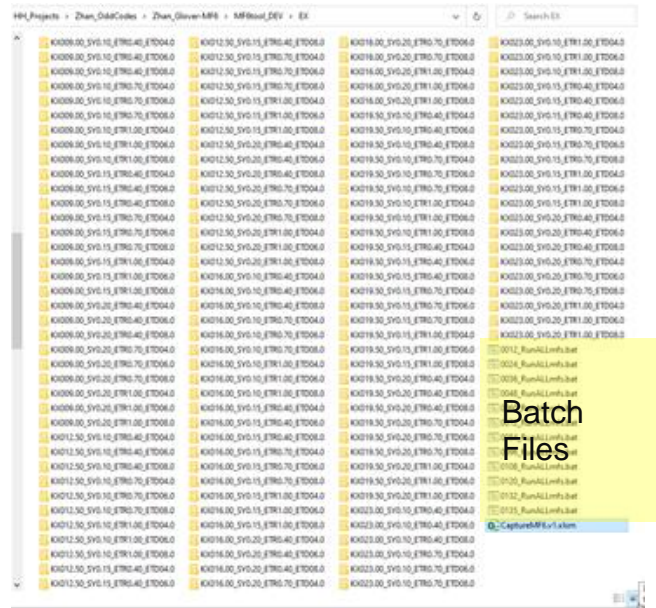


A “NO MF6 RESULTS” message appears if a **????\_RunALLmfs.bat** file exists in the folder with the CaptureMF6 workbook.


Click **Yes** and the models will be executed.

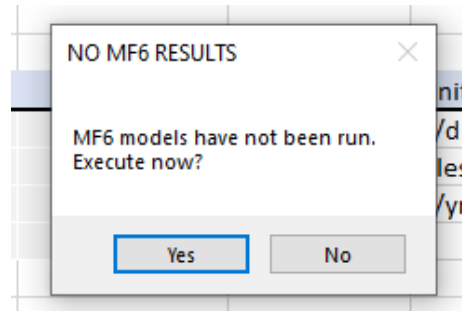


A command prompt will appear for each batch file and execute MODFLOW6 models assigned to each batch file.

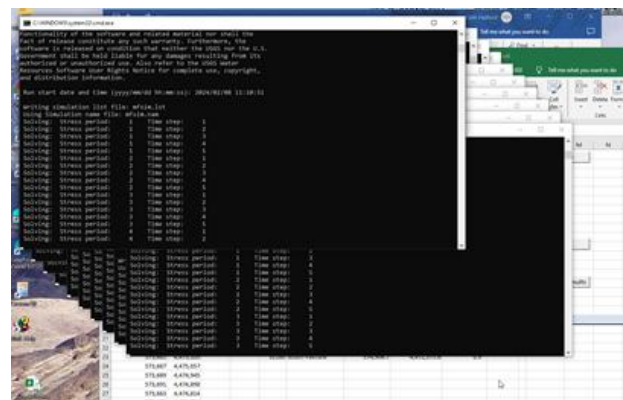


All **????\_RunALLmfs.bat** batch files are deleted after the MODFLOW6 models have been executed.

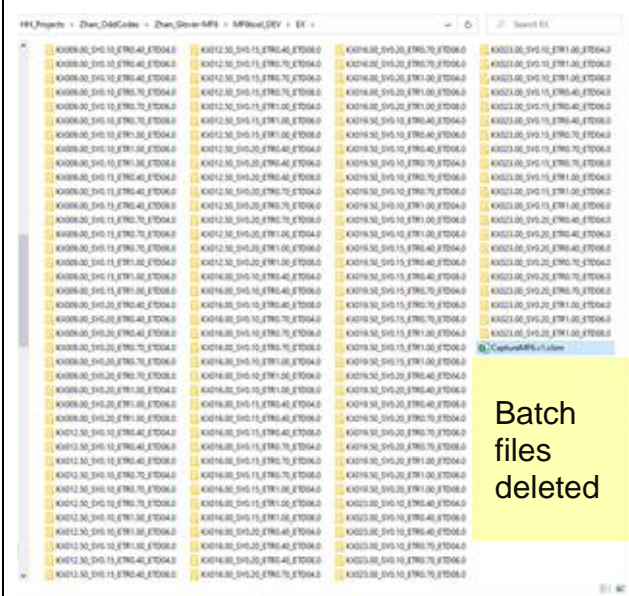


Click “Process MF6 results” after executing the MODFLOW6 models. Model results will be imported and synthesized in a new workbook.

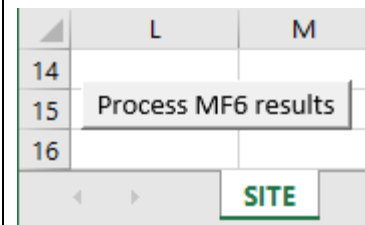


A “KEEP FOLDERS” message will appear. Click **Yes** to retain model subfolders. This is the default option. Click **No** to delete all models and subfolders.

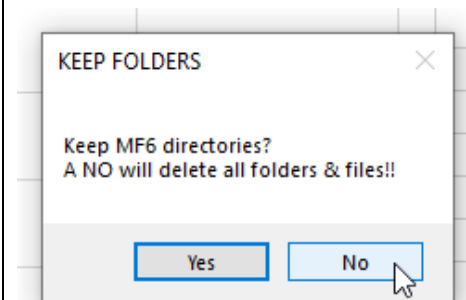

All files and subfolders created by CaptureMF6 workbook and MODFLOW6 are deleted after responding **No** to “KEEP FOLDERS” message.

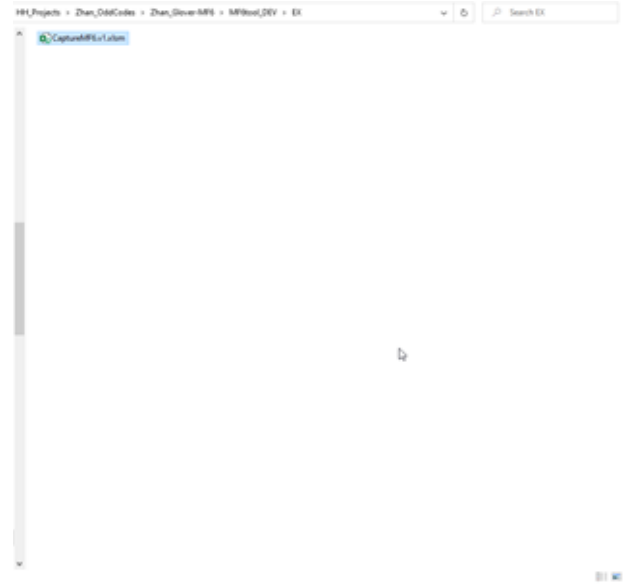

New workbook that summarizes simulated capture from stream and phreatophytes.

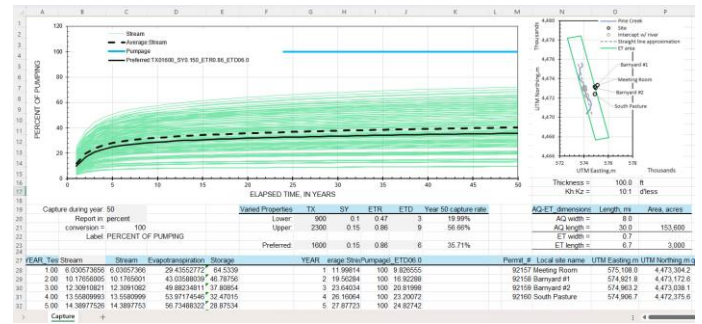


Bounds on each varied property can be adjusted in the new workbook.


The screenshot shows a spreadsheet with a table of 'Varied Properties'. The table has columns for 'TX' and 'SY'. The 'Upper' bound is set to 2300. A dropdown menu is open, showing a list of values: 900, 1250, 1500, 1950, and 2300. A yellow warning box is visible, stating 'Result missivity, P'. The 'Capture' button is highlighted.

Varied Properties	TX	SY
Lower:	900	0.1
Upper:	2300	0.15
Preferred:	1000	0.15
	1250	
	1500	
	1950	
	2300	0.791877

Individual and average capture results are limited to models within the minimum and maximum ranges specified in **G20:J21**.

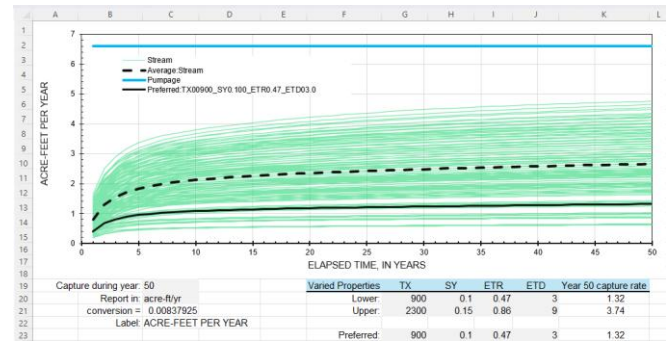


Results are limited to a single simulation where minimum and maximum values are equal for all 4 parameters in **G20:J21**.

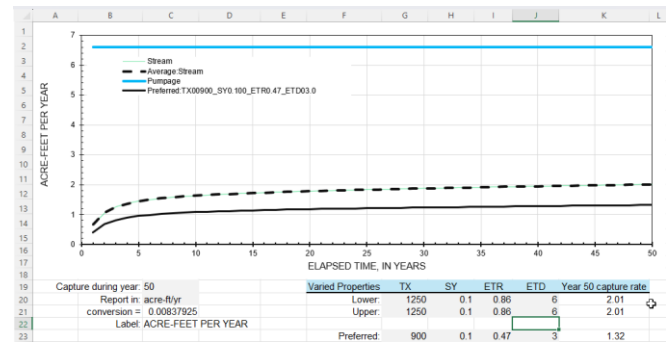


Preferred conditions are depicted with a singular realization as specified by selected parameters in **G23:J23**.

Selected properties are reported in series name, which is **Preferred:TX00900\_SY0.100\_ETR0.47\_ETD03.0** in this example.

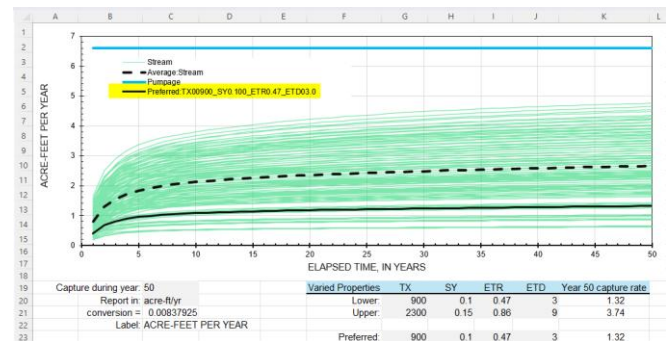


Capture from the stream is the default view.

Other sources of water to wells can be viewed by changing selection in **B26**.

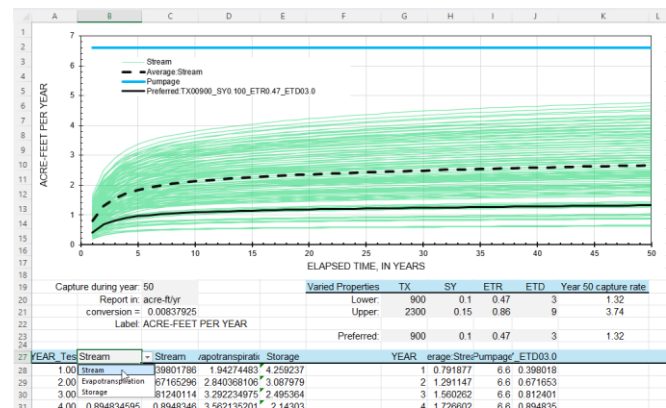




Capture from the evapotranspiration area is displayed if *Evapotranspiration* is selected in **B26**.

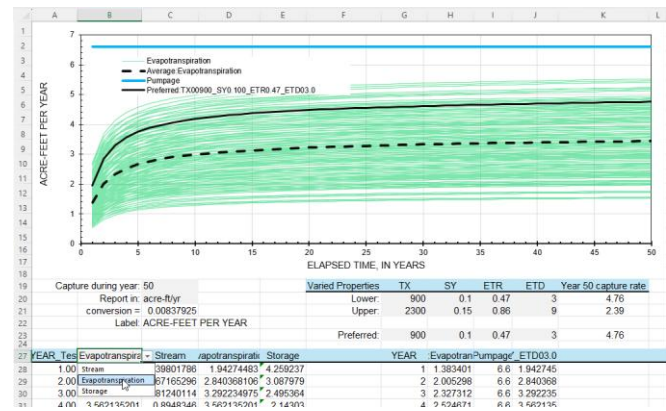

Water released from storage is displayed if *Storage* is selected in **B26**.

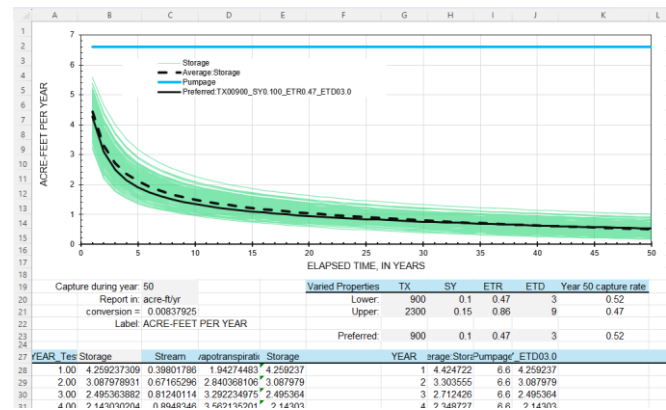


Capture during a specified year in **C19** is reported in **K20:K21, K23**. Default is the last year simulated. Reported units are selected in **C20**.

Capture during year: 50  
Report in: acre-ft/yr  
Capture +

Capture during specified year (**C19**) is reported for lower and upper range of varied properties, **K20:K21**, and preferred properties, **K23**.

Varied Properties	TX	Year 50 capture rate
Lower:	900	1.32
Upper:	2300	3.74
Preferred:	900	1.32

Changing reported units in **C20** affects chart, headings, and reported capture during a specified year, **K20:K21, K23**.

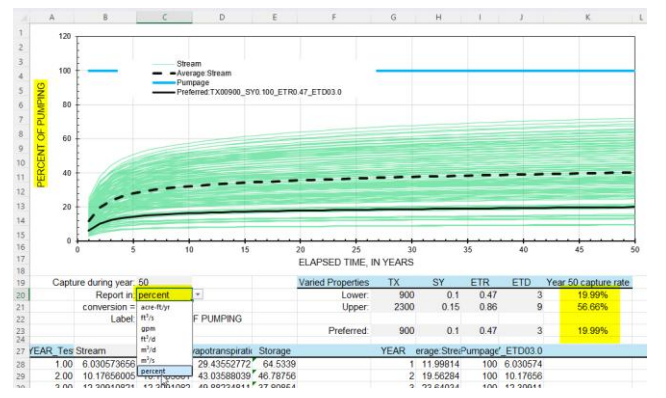


### Optional changes on CONTROL page

Macro HideUnhide will either reveal all worksheets or hide all sheets except the SITE page.

Will view either,



or



Macro name:

HideUnhide

HideUnhide  
MakeGrid  
ReadMF6output  
WriteMultipleMF6

Run

Step Into

Edit

Create

Delete

Options...

Macros in: All Open Workbooks

Description

Cancel

Frequency of MODFLOW output in results workbook can be altered with the table in **E2:F10**.

Filter frequency defaults to annual output for the first 50 years for consistency with NDWR analyses.

More times and simulated values are retained as filter frequency in column C is reduced.

	E	F
1		
2	FilterTIME	FilterFREQUENCY
3	0.00	365.00
4	730.00	365.00
5	3,650.00	365.00
6	18,250.00	365.00
7	18,980.00	365.00
8	21,900.00	365.00
9	36,500.00	1,825.00
10	73,000.00	3,650.00
11		

< > Capture CONTROL SITE

A few default parameters can be altered on the CONTROL page in column F.

Aquifer thickness in **F24**.

Kz in **F29**,

Default is Kx/10.

Storage coefficient in **F31**,  
Default is specific storage of 2.0E-6 1/ft times

Aquifer thickness in **F24**.

	E	F	G
16	Tag	Value	unit_Plus
24	DIS.zThickness	100	ft
25	DIS.1D-delX X-edge		differ
26	DIS.1D-delY Y-edge		differ
27	NPF.dTx-ft <sup>2</sup> Pd_TX	2,300	ft <sup>2</sup> /d
28	NPF.dKx-ftPd_KX	23.00	ft/d
29	NPF.dKz-ftPd_KZ	2.30	ft/d
30	STO.dStorCoeff_SY	0.15	d'less
31	STO.dStorCoeff_SS	0.0002	d'less
32	CHD.MaxCNT	83	count
33	CHD.LRC CHDnodes		

< > Capture CONTROL SITE